
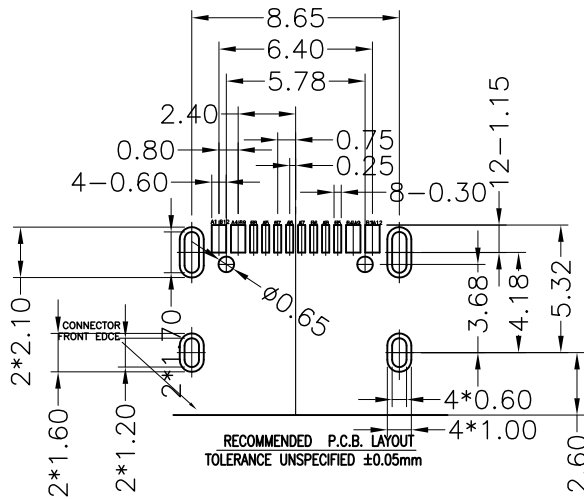
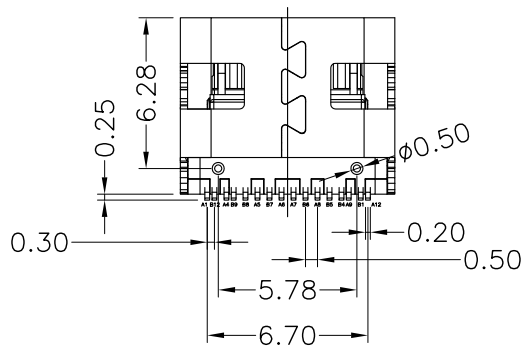
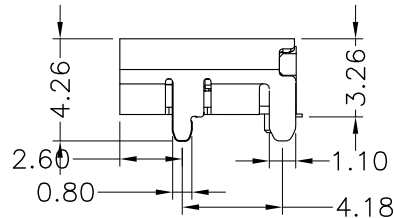
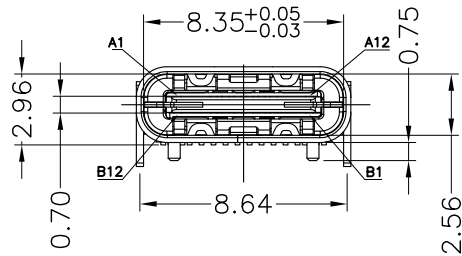


# 客户图



备注:

1.材质:

1.1胶芯: LCP+30%G.F UL94V-0

1.2端子: 磷铜, T=0.12mm; 镍底, 镀金Xμ”

1.3外壳: 不锈钢, T=0.30mm; 表面镀镍100μ”  
或亮锡100μ”

2.主要特性:

2.1额定电流: 0.5A

2.2接触阻抗: 30mΩ MAX

2.3绝缘阻抗: 100MΩ MIN 250V DC

2.4耐压测试: 250V AC

2.5沾锡性: 温度250±5℃, 时间5±0.5s

2.6整体插入力: 3.57kgf MAX

整体拔出力: 1.02kgf MIN

2.7使用寿命: 10000次

2.8工作温度: -30℃~+80℃

PIN ASSIGNMENT:

Pin No.	Signal Name	Pin No.	Signal Name
A1	CND	B12	CND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	CND	B1	CND

TOLERANCES

.X ±0.30

.XX ±0.20

.XXX ±0.10

ANGLES ±1.00°

东莞市欧盈电子科技有限公司

TEL:0769-82313999 FAX:0769-82001959

TITLE:  
USB Type-C/F 母座壳体7.6 16PIN 四只脚插板无弹

PART NO.:  
OY-S001-TYAF002-1-012

DRAWING NO.:

APPD.:

CHECK:

DRAWN:

REV.:	SIZE:	UNIT:	SCALE:	SHEET:
A/0	A4	M M	1 : 1	1 / 1